



400 Hz

AIRCRAFT GROUND POWER CABLES

HIFLEX® AGP400



**CGP WORKS IN CLOSE LIAISON
WITH THE MAJOR OEM
OF AEROSPACE AND DEFENCE INDUSTRIES**



omerin
LES CABLES DE L'EXTREME

CGP SAS, Cables for Global Performance belongs to the OMERIN group

AT CGP WE USE OUR KNOW-HOW
AND TECHNOLOGY TO DEVELOP INCREASINGLY
HIGH-PERFORMANCE PRODUCTS



Technical expertise

Since 1947, CGP has acquired a full control of electrical cable manufacturing processes.

Our R&D Department is made up of experienced engineers specialising in metallurgy, plastics, electromagnetic compatibility, micromechanics, data transmission, etc.

Our laboratory is equipped to test and validate the physical, mechanical, chemical and electrical behaviours and fire resistance of the cables we produce.




Men and Women at your service

The technical expertise of our teams is at your disposal, providing responses and solutions to all your requirements.

Our Methods, **Quality and Research & Development Departments** work permanently together with the aim of constantly improving our products and processes.

All our staff subscribe to this approach with their involvement and constant self-checking at all stages of production.

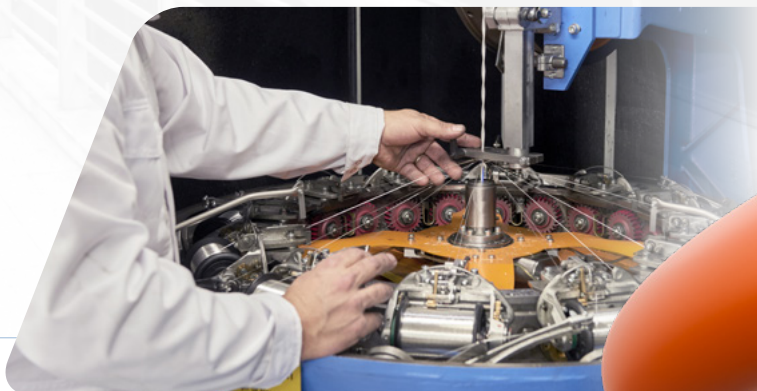

PRODUCT LIST

400 Hz AIRCRAFT GROUND POWER CABLES

REELING APPLICATIONS

HIFLEX® AGP 400 R	07
HIFLEX® AGP 400 R 3	08
HIFLEX® AGP 400 R 6	09

MOBILE APPLICATIONS

HIFLEX® AGP 400 M	11
HIFLEX® AGP 400 M i	12
HIFLEX® AGP 400 M iT	13
HIFLEX® AGP 400 M iTN	14

FIXED APPLICATIONS

HIFLEX® AGP 400 F	16
HIFLEX® AGP 400 F LH	17
HIFLEX® AGP 400 F A	18

HIGH PERFORMANCE SPECIAL MULTI-FUNCTION CABLES

OMBILIFLEX® hybrid and umbilical cables	20
---	----

400 Hz AIRCRAFT GROUND POWER CABLES





REELING APPLICATIONS

HIFLEX® AGP 400 R

• Conductor

1. Class 6 red copper according to IEC 60228
2. TPE-V thermoplastic rubber

• Control core

3. Class 6 tin plated copper according to IEC 60228
4. Polyester elastomer
Helicoïdal stranding of 3 or 4 conductors
5. Abrasion resistant polyurethan
6. Anti twisting braid
7. Abrasion resistant polyurethan



Applications

Extra-flexible electrical cable for electrical connection between the ground and the aircraft, allowing battery charging, pre-flight provisions, checks and maintenance operations. Suitable for use on reel.

Marking

CGP HIFLEX AGP 400 R -
7x[*cross-section*]mm² + 6x[nb control core]
x1 mm² - 0.6/1kV - [batch number]

Colour code

Phase Conductor:
Blue / White (x2) / Brown (x2) / Black (x2)
Control core: Black numbered
Internal Sheath: Orange
External Sheath: Orange
Other: please consult us.

General characteristics

• Thermal

Maximal use temperature in static use: **-40°C to +90°C**
Maximal use temperature in dynamic use: **-20°C to +90°C**

• Electrical


Operating voltage: 0.6 / 1 kV
Nominal voltage: 115 / 230 V
Test voltage: 4000 V
Maximal current rating : 25mm² : 210A / 35mm² : 270A
(*Tambient* : 30°C / *Tconductor* : 90°C)

• Mechanical strength

Minimal bending radius : 4 x Ø in static use
6 x Ø in dynamic use
Resistance to torsion and flexion: ★★★★★☆
Resistance to abrasion and tear: ★★★★★

• Chemical

All materials comply with the RoHs and Reach european directives
Good resistance to ozone, water, UV radiations and mineral oils
Halogen free materials according to IEC 60754
No corrosive and low toxicity gases.



7x25 mm² + 6x4x1 mm²
7x35 mm² + 6x4x1 mm²

Also available in
7x25 mm² + 6x3x1 mm²
7x35 mm² + 6x3x1 mm²

*General assembling: Helicoïdal stranding
Assembling protection by non woven polyester tape (covering: 25% min).*

AGP 400 R

Nb cores x Cross section	Cable outer diameter (mm)		Voltage drop (mV/Am)	Maximum linear resistance at 20°C (Ω / km)	Approx. Cable weight (kg / m)
	Min	Max			
7x25 mm ² + 6x3x1 mm ²	37.5	40.5	1 mm ² : 49 25 mm ² : 1.85	1 mm ² : 20.5 25 mm ² : 0.84	2.7
7x25 mm ² + 6x4x1 mm ²	37.5	40.5	1 mm ² : 49 25 mm ² : 1.85	1 mm ² : 20.5 25 mm ² : 0.84	2.7
7x35 mm ² + 6x3x1 mm ²	39.5	42.5	1 mm ² : 49 35 mm ² : 1.3	1 mm ² : 20.5 35 mm ² : 0.60	3.3
7x35mm ² + 6x4x1mm ²	39.5	42.5	1 mm ² : 49 35 mm ² : 1.3	1 mm ² : 20.5 35 mm ² : 0.60	3.3

For this product, please contact:

CGP SAS

62 route du Coin - 42400 Saint-Chamond - FRANCE
Phone: **+33 (0)4 77 31 02 54**
www.cgp@omerin.com



www.omerin.com

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company CGP SAS shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force. For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

© Registered trademark of the CGP SAS. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of CGP SAS.

HIFLEX® AGP 400 R 3

• Phase conductor


1. Class 6 tin plated copper according to IEC 60228
2. TPE-V thermoplastic rubber

• Neutral conductor

3. Extra flexible tin plated copper
4. TPE-V thermoplastic rubber

• Control core

5. Class 6 tin plated copper according to IEC 60228
6. Polyester elastomer
Helicoidal stranding of 4 conductors
7. Abrasion resistant polyurethan
8. Anti twisting braid
9. Abrasion resistant polyurethan

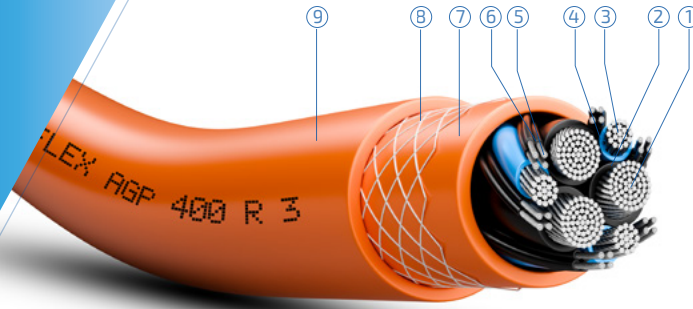

Applications

Extra-flexible electrical cable for electrical connection between the ground and the aircraft, allowing battery charging, pre-flight provisions, checks and maintenance operations. Suitable for use on reel.

Marking

CGP HIFLEX AGP 400 R 3 -
3x[*cross-section*]mm²
+ 3x[*cross-section*]mm²
+ 6X4X1 mm² - 0.6/1kV - [batch number]

Colour code

Phase Conductor: Black numbered
Neutral Conductor: Blue
Control core: Black numbered
Internal Sheath: Orange
External Sheath: Orange
Other: please consult us.

General characteristics

• Thermal

Maximal use temperature in static use: **-40°C to +90°C**
Maximal use temperature in dynamic use: **-20°C to +90°C**

• Electrical


Operating voltage: 0.6 / 1 kV
Nominal voltage: 115 / 230 V
Test voltage: 4000 V
Maximal current rating: 50mm² : 210 A / 70mm² : 270A
(*Tambient: 30°C / Tconductor: 90°C*)

• Mechanical strength

Minimal bending radius: 4 x Ø in static use
6 x Ø in dynamic use
Resistance to torsion and flexion: ★★★★★☆
Resistance to abrasion and tear: ★★★★★

• Chemical

All materials comply with the RoHs and Reach european directives
Good resistance to ozone, water, UV radiations and mineral oils
Halogen free materials according to IEC 60754
No corrosive and low toxicity gases.



3x50 mm² + 3x10 mm² + 6x4x1 mm²
3x70 mm² + 3x12 mm² + 6x4x1 mm²

*General assembling: Helicoidal stranding
Assembling protection by non woven polyester tape (covering: 25% min).*

AGP 400 R 3

Nb cores x Cross section	Cable outer diameter (mm)		Voltage drop (mV/Am)	Maximum linear resistance at 20°C (Ω / km)	Approx. Cable weight (kg / m)
	Min	Max			
3x50 mm ² + 3x10 mm ² + 6x4x1 mm ²	34.5	37.5	1 mm ² : 49 10 mm ² : 3.82 50 mm ² : 1	1 mm ² : 20.5 10 mm ² : 2.05 50 mm ² : 0.41	2.8
3x70 mm ² + 3x12 mm ² + 6x4x1 mm ²	39.5	42.5	1 mm ² : 49 12 mm ² : 2.9 70 mm ² : 0.77	1 mm ² : 20.5 12 mm ² : 1.65 70 mm ² : 0.277	3.4

For this product, please contact:

CGP SAS

62 route du Coin - 42400 Saint-Chamond - FRANCE

Phone: **+33 (0)4 77 31 02 54**

www.cgp@omerin.com

www.omerin.com

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company CGP SAS shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force. For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

© Registered trademark of the CGP SAS. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of CGP SAS.

HIFLEX® AGP 400 R 6

• **Phase conductor**


1. Class 6 red copper according to IEC 60228
2. TPE-V thermoplastic rubber

• **Neutral split conductor**

3. Class 6 red copper according to IEC 60228
4. Polyester elastomer

• **Control core**

5. Class 6 tin plated copper according to IEC 60228
6. Polyester elastomer
Helicoidal stranding of 4 conductors
7. Abrasion resistant polyurethan
8. Anti twisting braid
9. Abrasion resistant polyurethan

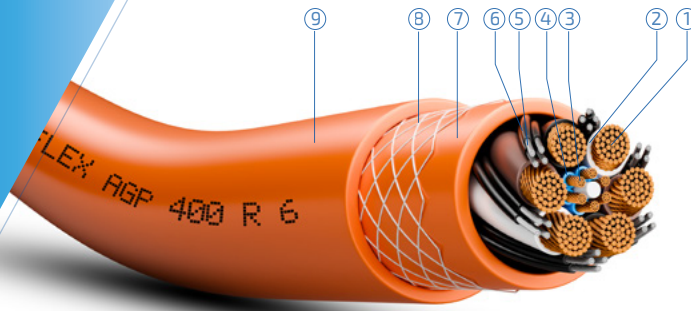

Applications

Extra-flexible electrical cable for electrical connection between the ground and the aircraft, allowing battery charging, pre-flight provisions, checks and maintenance operations. Suitable for use on reel.

Marking

CGP HIFLEX AGP 400 R 6 – 6x35 mm² + 6x6 mm² + 6X4X1 mm² – 0.6/1kV [batch number]

Colour code

Phase Conductor: White (x2) / Brown (x2) / Black (x2)
Neutral Conductor: Blue
Control core: Black numbered
Internal Sheath: Orange
External Sheath: Orange
Other: please consult us.

General characteristics

• **Thermal**

Maximal use temperature in static use: **-40°C to +90°C**
Maximal use temperature in dynamic use: **-20°C to +90°C**

• **Electrical**


Operating voltage: 0.6 / 1 kV
Nominal voltage: 115 / 230 V
Test voltage: 4000 V
Maximal current rating : 270A
(*Tambient : 30°C / Tconductor : 90°C*)

• **Mechanical strength**

Minimal bending radius : 3 x Ø in static use
6 x Ø in dynamic use
Resistance to torsion and flexion: ★★★★★
Resistance to abrasion and tear: ★★★★★

• **Chemical**

All materials comply with the RoHs and Reach european directives
Good resistance to ozone, water, UV radiations and mineral oils
Halogen free materials according to IEC 60754
No corrosive and low toxicity gases.



6x35 mm² + 6x6 mm² + 6x4x1 mm²

*General assembling: Helicoidal stranding
Assembling protection by non woven polyester tape (covering: 25% min).*

AGP 400 R 6

Nb cores x Cross section	Cable outer diameter (mm)		Voltage drop (mV/Am)	Maximum linear resistance at 20°C (Ω / km)	Approx. Cable weight (kg / m)
	Min	Max			
6x35 mm ² + 6x6 mm ² + 6x4x1 mm ²	39.5	42.5	1 mm ² : 49 6 mm ² : 6.7 35 mm ² : 1.3	1 mm ² : 20.5 6 mm ² : 3.6 35 mm ² : 0.6	3.4

For this product, please contact:

CGP SAS

62 route du Coin - 42400 Saint-Chamond - FRANCE

Phone: **+33 (0)4 77 31 02 54**

www.cgp@omerin.com



www.omerin.com

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company CGP SAS shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force. For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

© Registered trademark of the CGP SAS. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of CGP SAS.



MOBILE APPLICATIONS

HIFLEX® AGP 400 M

• **Conductor**

1. Class 6 red copper according to IEC 60228
2. TPE-V thermoplastic rubber

• **Control core**

3. Class 6 tin plated copper according to IEC 60228
4. Polyester elastomer
Helicoidal stranding of 3 or 4 conductors
5. Abrasion resistant polyurethan



Applications

Extra-flexible electrical cable for electrical connection between the ground and the aircraft, allowing battery charging, pre-flight provisions, checks and maintenance operations.

Marking

CGP HIFLEX AGP 400 M -
7x[*cross-section*]mm² + 6x[*nb control core*]x1 mm² - 0.6/1kV - [batch number]

Colour code

Conductor:
Blue / white (x2) / brown (x2) / black (x2)
Control core: Black numbered
External Sheath: Orange
Other: please consult us.

General characteristics

• **Thermal**

Maximal use temperature in static use: **-40°C to +90°C**
Maximal use temperature in dynamic use: **-20°C to +90°C**

• **Electrical**

Operating voltage: 0.6 / 1 kV
Nominal voltage: 115 / 230 V
Test voltage: 4000 V
Maximal current rating : 25mm² : 210A / 35mm² : 270A
(*Tambient: 30°C / Tconductor: 90°C*)


• **Mechanical strength**

Minimal bending radius : 4 x Ø in static use
6 x Ø in dynamic use

Resistance to torsion and flexion: ★★★★★☆
Resistance to abrasion and tear: ★★★★★

• **Chemical**

All materials comply with the RoHs and Reach european directives
Good resistance to ozone, water, UV radiations and mineral oils
Halogen free materials according to IEC 60754
No corrosive and low toxicity gases.



7x25 mm² + 6x4x1 mm²
7x35 mm² + 6x4x1 mm²

Also available in
7x25 mm² + 6x3x1 mm²
7x35 mm² + 6x3x1 mm²

*General assembling: Helicoidal stranding
Assembling protection by non woven polyester tape (covering : 25% min).*

AGP 400 M

Nb cores x Cross section	Cable outer diameter (mm)		Voltage drop (mV/Am)	Maximum linear resistance at 20°C (Ω / km)	Approx. Cable weight (kg / m)
	Min	Max			
7x25 mm ² + 6x3x1 mm ²	35.5	38.5	1 mm ² : 49 25mm ² : 1.85	1 mm ² : 20.5 25 mm ² : 0.84	2.5
7x25 mm ² + 6x4x1 mm ²	35.5	38.5	1 mm ² : 49 25mm ² : 1.85	1 mm ² : 20.5 25 mm ² : 0.84	2.5
7x35 mm ² + 6x3x1 mm ²	37.5	40.5	1 mm ² : 49 35 mm ² : 1.3	1 mm ² : 20.5 35 mm ² : 0.60	3.2
7x35 mm ² + 6x4x1 mm ²	37.5	40.5	1 mm ² : 49 35 mm ² : 1.3	1 mm ² : 20.5 35 mm ² : 0.60	3.2

For this product, please contact:

CGP SAS

62 route du Coin - 42400 Saint-Chamond - FRANCE
Phone: **+33 (0)4 77 31 02 54**
www.cgp@omerin.com



www.omerin.com

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company CGP SAS shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force. For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

© Registered trademark of the CGP SAS. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of CGP SAS.

HIFLEX® AGP 400 M i

• **Conductor**

1. Class 6 tin plated copper according to IEC 60228

• **Control core**


2. Class 6 tin plated copper according to IEC 60228

3. Polyester elastomer

Helicoidal stranding of 2 conductors

4. Abrasion resistant polyurethan
(abrasion indicator)

5. Abrasion resistant polyurethan

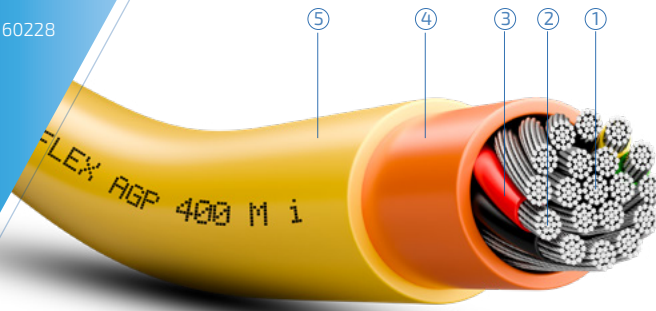

Applications

Extra-flexible electrical cable for electrical connection between the ground and the aircraft, allowing battery charging, pre-flight provisions, checks and maintenance operations.

Marking

CGP HIFLEX AGP 400 M i

1x[cross-section]mm² + 4x1mm² - 0.6/1kV - [batch number]

Colour code

Control core: Yellow, green, red, black

Internal Sheath: Orange (abrasion indicator)

External Sheath: Yellow

Other: please consult us.

General characteristics

• **Thermal**

Maximal use temperature in static use: **-40°C to +90°C**

Maximal use temperature in dynamic use: **-20°C to +90°C**

• **Electrical**

Operating voltage: 0.6 / 1 kV

Nominal voltage: 115 / 230 V

Test voltage: 4000 V

• **Mechanical strength**

Minimal bending radius : 4 x Ø in static use

6 x Ø in dynamic use

Resistance to torsion and flexion: ★★★★★☆

Resistance to abrasion and tear: ★★★★★


• **Chemical**

All materials comply with the RoHs and Reach european directives

Good resistance to ozone, water, UV radiations and mineral oils

Halogen free materials according to IEC 60754

No corrosive and low toxicity gases.



1x35 mm² + 4x1 mm²
1x50 mm² + 4x1 mm²

Also available in
1x70 mm² + 4x1 mm²
1x95 mm² + 4x1 mm²
1x120 mm² + 4x1 mm²

General assembling: Helicoidal stranding
Assembling protection by non woven polyester tape (covering : 25% min).

AGP 400 M i

Nb cores x Cross section	Cable outer diameter (mm)		Voltage drop (mV/Am)	Maximum linear resistance at 20°C (Ω / km)	Maximal current rating	Approx. Cable weight (kg / m)
	Min	Max				
1x35 mm ² + 4x1 mm ²	12	16	1 mm ² : 49 35 mm ² : 1.3	1 mm ² : 20.5 35 mm ² : 0.554	154	0.5
1x50 mm ² + 4x1 mm ²	15	19	1 mm ² : 49 50 mm ² : 1	1 mm ² : 20.5 50 mm ² : 0.393	200	0.7
1x70 mm ² + 4x1 mm ²	17.5	19.5	1 mm ² : 49 70 mm ² : 0.68	1 mm ² : 20.5 70 mm ² : 0.277	265	0.9
1x95 mm ² + 4x1 mm ²	18	22	1 mm ² : 49 95 mm ² : 0.42	1 mm ² : 20.5 95 mm ² : 0.210	290	1.1
1x120 mm ² + 4x1 mm ²	23	27	1 mm ² : 49 120 mm ² : 0.35	1 mm ² : 20.5 120 mm ² : 0.164	340	1.5

For this product, please contact:

CGP SAS

62 route du Coin - 42400 Saint-Chamond - FRANCE

Phone: +33 (0)4 77 31 02 54

www.cgp@omerin.com

www.omerin.com


The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company CGP SAS shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force. For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

© Registered trademark of the CGP SAS. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of CGP SAS.



HIFLEX® AGP 400 M iT

- **Conductor**
- 1. Class 6 tin plated copper according to IEC 60228
- **Control core**
- 2. Class 6 tin plated copper according to IEC 60228
- 3. Polyester elastomer
- 4. Abrasion resistant polyurethan (abrasion indicator)
- 5. Abrasion resistant polyurethan

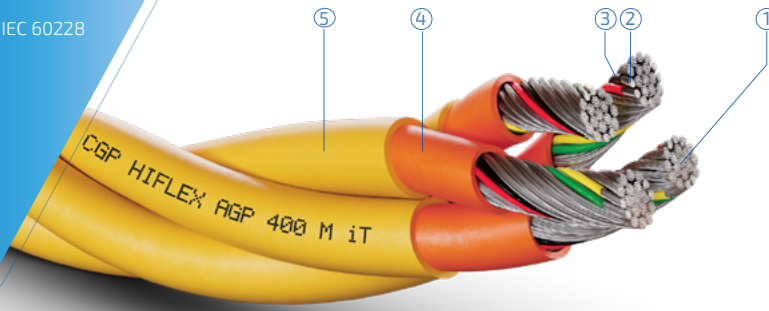

Applications

Extra-flexible electrical cable for electrical connection between the ground and the aircraft, allowing battery charging, pre-flight provisions, checks and maintenance operations.

Marking

CGP HIFLEX AGP 400 M iT -
1x[cross-section]mm² + 4x1mm² - 0.6/1kV -
[batch number]

Colour code

Control core: Yellow, green, red, black
Internal Sheath: Orange (abrasion indicator)
External Sheath: Yellow
Other: please consult us.

General characteristics

• Thermal

Maximal use temperature in static use: **-40°C to +90°C**
Maximal use temperature in dynamic use: **-20°C to +90°C**

• Electrical


Operating voltage: 0.6 / 1 kV
Nominal voltage: 115 / 230 V
Test voltage: 4000 V

• Mechanical strength

Minimal bending radius : 4 x Ø in static use
6 x Ø in dynamic use
Resistance to torsion and flexion: ★★★★★☆
Resistance to abrasion and tear: ★★★★★

• Chemical

All materials comply with the RoHs and Reach european directives
Good resistance to ozone, water, UV radiations and mineral oils
Halogen free materials according to IEC 60754
No corrosive and low toxicity gases.



4x(1x35 mm² + 4x1 mm²)
4x(1x50 mm² + 4x1 mm²)
4x(1x70 mm² + 4x1 mm²)

*General assembling: Helicoidal stranding
Assembling protection by non woven polyester tape (covering : 25% min).*

AGP 400 M iT

Nb cores x Cross section	Conductor diameter (mm)		Voltage drop (mV/Am)	Maximum linear resistance at 20°C (Ω / km)	Current rating	Approx. Cable weight (kg / m)
	Min	Max				
4x(1x35 mm ² + 4x1 mm ²)	32	36	1 mm ² : 49 35 mm ² : 1.3	1 mm ² : 20.5 35 mm ² : 0.554	154	2.1
4x(1x50 mm ² + 4x1 mm ²)	39	43	1 mm ² : 49 50 mm ² : 1.0	1 mm ² : 20.5 50 mm ² : 0.393	200	2.8
4x(1x70 mm ² + 4x1 mm ²)	43	47	1 mm ² : 49 70 mm ² : 0.77	1 mm ² : 20.5 70 mm ² : 0.277	265	3.8

For this product, please contact:

CGP SAS

62 route du Coin - 42400 Saint-Chamond - FRANCE
Phone: **+33 (0)4 77 31 02 54**
www.cgp@omerin.com



www.omerin.com

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company CGP SAS shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force. For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

© Registered trademark of the CGP SAS. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of CGP SAS.

HIFLEX® AGP 400 M iTN

• Phase conductor


1. Class 6 tin plated copper according to IEC 60228
2. TPE-V thermoplastic rubber

• Neutral conductor

3. Stranded tin plated copper

• Control core

4. Class 6 tin plated copper according to IEC 60228
5. Polyester elastomer
6. Abrasion resistant polyurethan (abrasion indicator)
7. Abrasion resistant polyurethan

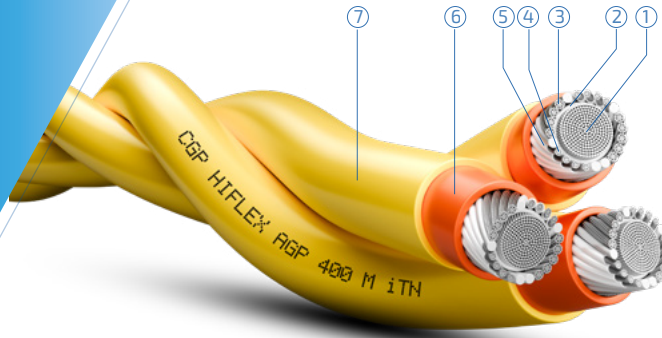

Applications

Extra-flexible electrical cable for electrical connection between the ground and the aircraft, allowing battery charging, pre-flight provisions, checks and maintenance operations.

Marking

CGP HIFLEX AGP 400 M iTN
1x[*cross-section*]mm² + [nb neutral conductor]x[*cross-section*]mm² + 8x1mm² - 0.6/1kV - [batch number]

Colour code

Phase Conductor: White
Control core: White numbered
Internal Sheath: Orange (abrasion indicator)
External Sheath: Yellow
Other: please consult us.

General characteristics

• Thermal

Maximal use temperature in static use: **-40°C to +90°C**
Maximal use temperature in dynamic use: **-20°C to +90°C**

• Electrical


Operating voltage: 0.6 / 1 kV
Nominal voltage: 115 / 230 V
Test voltage: 4000 V
Maximal current rating : 270A
(*T*_{ambient}: 30°C / *T*_{conductor}: 90°C)

• Mechanical strength

Minimal bending radius : 3 x Ø in static use
4 x Ø in dynamic use
Resistance to torsion and flexion: ★★★★★
Resistance to abrasion and tear: ★★★★★

• Chemical

All materials comply with the RoHs and Reach european directives
Good resistance to ozone, water, UV radiations and mineral oils
Halogen free materials according to IEC 60754
Flame retardant cable according to IEC60332-1
No corrosive and low toxicity gases.



3x(1x50 mm² / 20 + 8x1 mm²)
3x(1x70 mm² / 25 + 8x1 mm²)

Concentric stranding of 8 control conductors + neutral conductor + eventual fillers for cylindricity around the phase conductor.

Assembling protection by non woven polyester tape (covering : 25% mini).

AGP 400 M iTN

Nb cores x Cross section	Cable outer diameter (mm)		Voltage drop (mV/Am)	Maximum linear resistance at 20°C (Ω / km)	Approx. Cable weight (kg / m)
	Min	Max			
3x(1x50 mm ² / 20 + 8x1 mm ²)	42.5	45.5	1 mm ² : 49 50 mm ² : 1.0	1 mm ² : 20.5 50 mm ² : 0.393	3.1
3x(1x70 mm ² / 25 + 8x1 mm ²)	47.5	50.5	1 mm ² : 49 70 mm ² : 0.77	1 mm ² : 20.5 70 mm ² : 0.277	3.8

For this product, please contact:

CGP SAS

62 route du Coin - 42400 Saint-Chamond - FRANCE
Phone: **+33 (0)4 77 31 02 54**
www.cgp@omerin.com



www.omerin.com

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company CGP SAS shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force. For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

© Registered trademark of the CGP SAS. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of CGP SAS.



FIXED APPLICATIONS

HIFLEX® AGP 400 F

• **Conductor**

1. Class 5 red copper according to IEC 60228
2. Polyethylen

• **Control core**

3. Class 6 tin plated copper according to IEC 60228
4. Polyester elastomer
Helicoidal stranding of 4 conductors
5. Halogen free polyolefin



Applications

Electrical cable for fixed installation: underground connection between the power unit and the stationary unit, allowing battery charging, pre-flight provisions, checks and maintenance operations.

Marking

CGP HIFLEX AGP 400 F – 7x35mm²
+ 6x4x1 mm² – 0.6/1kV – [batch number]

Colour code

Conductor: Blue / black numbered 1 to 3 (x2)
Control core: White numbered
External Sheath: Black
Other: please consult us.

General characteristics

• **Thermal**

Maximal use temperature in dynamic use: **-20°C to +90°C**

• **Electrical**

Operating voltage: 0.6 / 1 kV
Nominal voltage: 115 / 230 V
Test voltage: Power cores: 4000 V
Control cores: 1500 V
Maximal current rating: 270A
(*Tambient: 30°C / Tconductor: 90°C*)

• **Mechanical strength**


Minimal bending radius: 7 x Ø in static use

• **Chemical**

All materials comply with the RoHs and Reach european directives
Good resistance to chemical attack
Halogen free materials according to IEC 60754-1
Low corrosivity according to IEC 60754-2
Low emission of opaque smoke according to IEC61034-2
Water resistance: AD6.

• **Fire-performance**

Flame retardant according to IEC60332-1



7x35 mm² + 6x4x1 mm²

*General assembling: Helicoidal stranding
Assembling protection by non woven polyester tape (covering : 25% min).*

AGP 400 F

Nb cores x Cross section	Cable outer diameter (mm)		Voltage drop (mV/Am)	Maximum linear resistance at 20°C (Ω / km)	Approx. Cable weight (kg / m)
	Min	Max			
7x35 mm ² + 6x4x1 mm ²	35.5	38.5	1 mm ² : 49 35 mm ² : 1.3	1 mm ² : 20.5 35 mm ² : 0.60	2.8

For this product, please contact:

CGP SAS

62 route du Coin - 42400 Saint-Chamond - FRANCE

Phone: **+33 (0)4 77 31 02 54**

www.cgp@omerin.com



www.omerin.com

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company CGP SAS shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force. For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

© Registered trademark of the CGP SAS. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of CGP SAS.

HIFLEX® AGP 400 F LH

• **Conductor**

1. Class 5 red copper according to IEC 60228
2. Polyvinyl chloride

• **Control core**

3. Class 6 tin plated copper according to IEC 60228
4. Polyester elastomer
Helicoidal stranding of 3 or 4 conductors
5. Polyvinyl chloride



Applications

Electrical cable for fixed installation: underground connection between the power unit and the stationary unit, allowing battery charging, pre-flight provisions, checks and maintenance operations.

Marking

CGP HIFLEX AGP 400 F LH - 7x[*cross-section*]mm² + 6x[nb control core]x1mm² - 0.6/1kV - [batch number]

Colour code

Conductor: Blue / white (x2) / brown (x2) / black (x2)
Control core: Black numbered
External Sheath: Orange
Other: please consult us.

General characteristics

• **Thermal**

Maximal use temperature in static use: **-30°C to +90°C**

• **Electrical**


Operating voltage: 0.6 / 1 kV
Nominal voltage: 115 / 230 V
Test voltage: 4000 V
Maximal current rating : 25mm² : 210A / 35mm² : 270A
(*T_{ambient} : 30°C / T_{conductor} : 90°C*)

• **Mechanical strength**

Minimal bending radius : 6 x Ø in static use

• **Chemical**

All materials comply with the RoHs and Reach european directives
Good resistance to ozone, water, UV radiations and mineral oils.



7x25 mm² + 6x4x1 mm²
7x35 mm² + 6x4x1 mm²

Also available in
7x25 mm² + 6x3x1 mm²
7x35 mm² + 6x3x1 mm²

*General assembling: Helicoidal stranding
Assembling protection by non woven polyester tape (covering : 25% min).*

AGP 400 F LH

Nb cores x Cross section	Cable outer diameter (mm)		Voltage drop (mV/Am)	Maximum linear resistance at 20°C (Ω / km)	Approx. Cable weight (kg / m)
	Min	Max			
7x25 mm ² + 6x3x1 mm ²	35.5	38.5	1 mm ² : 49 25 mm ² : 1.85	1 mm ² : 20.5 25 mm ² : 0.84	2.5
7x25 mm ² + 6x4x1 mm ²	35.5	38.5	1 mm ² : 49 25 mm ² : 1.85	1 mm ² : 20.5 25 mm ² : 0.84	2.5
7x35 mm ² + 6x3x1 mm ²	37.5	40.5	1 mm ² : 49 35 mm ² : 1.3	1 mm ² : 20.5 35 mm ² : 0.60	3.2
7x35 mm ² + 6x4x1 mm ²	37.5	40.5	1 mm ² : 49 35 mm ² : 1.3	1 mm ² : 20.5 35 mm ² : 0.60	3.2

For this product, please contact:

CGP SAS

62 route du Coin - 42400 Saint-Chamond - FRANCE

Phone: **+33 (0)4 77 31 02 54**

www.cgp@omerin.com



www.omerin.com

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company CGP SAS shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force. For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

© Registered trademark of the CGP SAS. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of CGP SAS.

HIFLEX® AGP 400 F A

• **Conductor**

1. Class 5 red copper according to IEC 60228
2. Polyethylen

• **Control core**

3. Class 6 tin plated copper according to IEC 60228
4. Polyester elastomer
Helicoidal stranding of 4 conductors

5. Halogen free polyolefin
6. Double steel tape
7. Halogen free polyolefin



Applications

Electrical cable for fixed installation: underground connection between the power unit and the stationary unit, allowing battery charging, pre-flight provisions, checks and maintenance operations.

Marking

CGP HIFLEX AGP 400 F A -
7x35 mm² + 6x4x1 mm² - 0.6/1kV
[batch number]

Colour code

Conductor: Blue / black numbered 1 to 3 (x2)
Control core: White numbered
External Sheath: Black
Other: please consult us.

General characteristics

• **Thermal**

Maximal use temperature in dynamic use: **-20°C to +90°C**

• **Electrical**

Operating voltage: 0.6 / 1 kV
Nominal voltage: 115 / 230 V
Test voltage: Power cores: 4000 V
Control cores: 1500 V
Maximal current rating: 270A
(*T_{ambient} : 30°C / T_{conductor} : 90°C*)

• **Mechanical strength**


Minimal bending radius: 10 x Ø in static use
Impact resistance: AG4
Rodent resistant

• **Chemical**

All materials comply with the RoHs and Reach european directives
Good resistance to chemical attack
Halogen free materials according to IEC 60754-1
Low corrosivity according to IEC 60754-2
Low emission of opaque smoke according to IEC61034-2
Water resistance: AD6

• **Fire-performance**

Flame retardant according to IEC60332-1.



7x35 mm² + 6x4x1 mm²

*General assembling: Helicoidal stranding
Assembling protection by non woven polyester tape (covering : 25% min).*

AGP 400 F A					
Nb cores x Cross section	Cable outer diameter (mm)		Voltage drop (mV/Am)	Maximum linear resistance at 20°C (Ω / km)	Approx. Cable weight (kg / m)
	Min	Max			
7x35 mm ² + 6x4x1 mm ²	38.5	41.5	1 mm ² : 49 35 mm ² : 1.3	1 mm ² : 20.5 35 mm ² : 0.60	3.6

For this product, please contact:

CGP SAS

62 route du Coin - 42400 Saint-Chamond - FRANCE

Phone: +33 (0)4 77 31 02 54

www.cgp@omerin.com



www.omerin.com

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company CGP SAS shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force. For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

© Registered trademark of the CGP SAS. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of CGP SAS.

A photograph of an aircraft maintenance worker in a white hard hat and orange safety vest, kneeling on the tarmac and working on the engine of an aircraft. The worker is wearing blue gloves and is focused on the task. The engine's fan is prominent in the background. A blue graphic overlay is present in the upper left corner, containing the text 'HIGH PERFORMANCE SPECIAL MULTI-FUNCTION CABLES'.

**HIGH
PERFORMANCE
SPECIAL
MULTI-FUNCTION
CABLES**

OMBILIFLEX®

SIGNAL

Data bus, Coaxial
Fibre optic, Thermocouple
Impedance 50 Ω to 150 Ω
Single-mode/multi-mode fibres
Thermocouple Couple T, J, E, K, N

ELECTROMAGNETIC SCREEN

Low and high frequencies

TRACTION

By cord or braid

Tensile strength 10 daN to 6,000 daN

ENERGY

Power, Control, Command
Very Low Voltage to 1,000 V

FLUID

Pneumatic or Hydraulic

Low and high pressure tube, non-toxic tube,
high temperatures, excellent chemical resistance, etc.

BENDING

Use in movements

Power chain, alternate bending,
bending and torsional stresses

High performance characteristics

OMBILIFLEX® cables undergo numerous tests at every production stage to ensure a high level of quality and to meet your requirements

Our laboratory has the means to test and validate the physical, mechanical, chemical, electrical and fire behaviours of the cables we produce

Applications

This range of multifunction hybrid cables is intended for cutting-edge sectors like aerospace, military applications, robotics, medical applications, oil exploration, industry, etc.

Customized products

CGP INNOVATION

Thanks to our expertise and total mastery of our electrical cable manufacturing processes, the engineers of our R & D department have developed the OMBILIFLEX® range. Umbilical cables that can combine up to 6 different functions in one single product: **Energy, Signal, Fluid, Traction, Flexion and Electromagnetic protection**. This range of hybrid and multi-functional cables is designed for high-tech sectors such as aeronautics, military, robotics, medical, oil exploration, industry, etc.

Our Design Office is made up of experienced engineers who are specialists in **metallurgy, plastics manufacture, electromagnetic compatibility, micromechanics, data transmission, etc.** It will provide you with a fast, precise response by developing an OMBILIFLEX® formed of power cables, twisted pairs, coaxial cables, tubes, fibre optics, shielding, braid or traction cord, etc. in line with the miscellaneous and complex constraints of your applications.

SAMPLE PRODUCTION

OMBILIFLEX® U5-1000ITJD

Aerospace/Machine tools sector

Umbilical cable for industrial drill used to assemble the metal structure of an aircraft.

This OMBILIFLEX® cable transfers the fluid (pressurised oil), information (running the tooling) and power (supplying the tooling) and ensures good tensile strength and resistance to alternating movements.



OMBILIFLEX® U3-10000B

Defence/Military sector

Umbilical cable for airborne video surveillance systems.

This OMBILIFLEX® cable transfers power (camera supply) and information via fibre optics (high speed video/audio) and maintains very high tensile strength (> 4 000 daN).



For this product, please contact:

CGP SAS

62 route du Coin - 42400 Saint-Chamond - FRANCE

Phone: +33 (0)4 77 31 02 54

www.cgp@omerin.com



www.omerin.com

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company CGP SAS shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force. For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

© Registered trademark of the CGP SAS. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of CGP SAS.



62, route du Coin
42400 Saint-Chamond
France

Tél.: **+33 (0)4 77 31 02 54**
cgp@omerin.com



www.omerin.com