




8

PYROMETRY CABLES

omerin
LES CABLES DE L'EXTREME

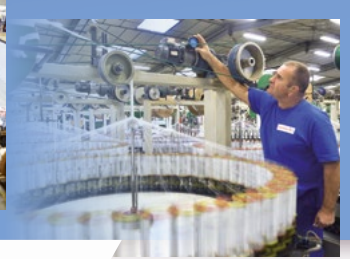


- The world's leading manufacturer of silicone-insulated wires and cables
- Europe's leading manufacturer of glass-yarn braids
- France's leading manufacturer of fire safety cables

The Omerin group has been producing electrical cables for extreme conditions since 1959

At Omerin, we use our know-how and technology to develop increasingly high-performance products.

Our expertise is recognized in over 120 countries.

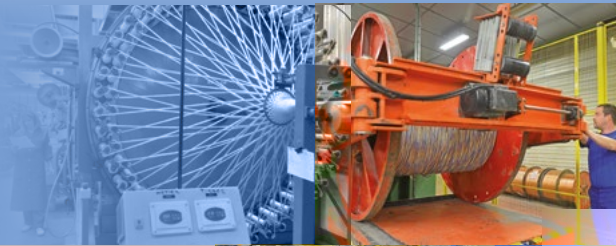

Omerin offers a wide range of high-performance products covering a large number of applications in very diverse industries, including the electrothermal construction, electromechanical, chemical, nuclear energy, railway, naval, aeronautical, heavy industry, power plant and other sectors.

Our product range is further extended by varnished, impregnated and treated braided insulating sleeveings, door seals for ovens, fireproof sleeveings, thermocouple, extension and compensation cables as well as industrial braids.

Men and women at your service

The technical expertise of our teams is at your disposal, providing responses and solutions to all your requirements.

Our Methods, Quality and Research and Development Departments work permanently together with the aim of constantly improving our products and processes.

All our staff subscribe to this approach with their involvement and constant self-checking at all stages of production.

List of all the available catalogues:

HIGH TEMPERATURE WIRES AND CABLES FOR THE GENERAL MARKET ①
SECTION I: CROSS LINKED ELASTOMERS

HIGH TEMPERATURE WIRES AND CABLES FOR THE GENERAL MARKET ②
SECTION II: FLUOROPOLYMERS AND THERMOPLASTICS

HIGH TEMPERATURE WIRES AND CABLES FOR THE GENERAL MARKET ③
SECTION III: COMPOSITE INSULATIONS

FIRE RESISTANT SAFETY CABLES ④

CABLE SOLUTIONS FOR ROLLING STOCK ⑤

CABLES FOR POWER STATIONS AND HIGH-RISK SITES ⑥

MARINE CABLES ⑦

PYROMETRY CABLES ⑧

BRAIDED INSULATING SLEEVINGS ⑨

HIGH TEMPERATURE MEDIUM VOLTAGE POWER CABLES ⑩

PACKAGING AND TECHNICAL DATA

Ultimately, this catalogue is the result of the passionate endeavours of an entire team, who have displayed great talent in writing it for you.

It is designed to be a simple and concise working tool for you, serving as a reference document that is able to meet the majority of your needs.

This catalogue, as well as ten others from our collection are available on line with real time updates and much more information at



www.omerin.com

All the trademarks listed below are registered trademarks of the OMERIN Group.

BIO-HABITAT®	Wires and cables for a home without electromagnetic interference
CERAFIL®	Miniature ceramic insulated wires for very high temperatures
COAXRAIL®	Coaxial cables for railway industry
COAXTHERM®	High temperature coaxial cables
COUPLIX®	Pyrometry cables (thermocouples, extension, compensation cables)
DATARAIL®	Data cables for the railway industry
ELECTROAIR®	Aerospace & Defence wires and cables
ENERSYL®	Electrical cables for power station and high risk sites
FLEXBAT®	Extra flexible battery cables
LUMIPLAST®	Wires and cables for lighting systems
METALTRESSE®	High performance metallic braids
MINOROC®	Very high tensile strength synthetic cables
MULTIMAX®	Power, control and instrumentation cables for the marine industry
MULTI-VX®	Hybrid data and power cables
ODIOSIS®	Sound, amplification and loudspeaker cables
OILPLAST®	Cables for industrial environments and intrinsically safe system
OMBILIFLEX®	High performance special multi-function cables
PLASTHERM®	Special thermoplastic insulated wires and cables
POWER CONNECT®	High performance power cords
PROFIPLAST®	Thermoplastic insulated wires and cables
PYRISOL®	Fire resistant power cables for safety circuits
PYRITEL®	Fire resistant communication cables for safety circuits
SILIBOX®	Wire and cables cardboard box packaging system
SILICABLE®	Special high temperature wires and cables
SILICOU®	Low and medium voltage class H (180°C) power cables
SILIFLAM®	Very high safety cables for extreme temperatures
SILIFLON®	Fluoropolymer insulated high temperature wires and cables
SILIGAIN®	Braided insulating sleeveings
SILIRAD®	Electron beam cross-linked cables
SILITUBE®	Braided or extruded tubes
SOLARPLAST®	Power cables for photovoltaic solar panels
SONDIX®	Platinum resistance temperature sensors connection cables
SPIRFLEX®	High performance spiral cables
TEXALARM®	Cables for safety systems and fire alarms
TS CABLES®	Coaxial and data cables
TS COM 900®	Telephonic cables for very speed reception
TS LAN®	Copper LAN cables
TWINLINK®	High temperature controlled impedance twisted pair cables
TWINPLAST®	Extra flexible cables for battery chargers or jump starters
VARPREN®	Wires and cables with special cross-linked Varpren® insulation
VEROX®	Fiberglass braided seals
VIDEOCOAX®	Analogue and digital video cables



Thermal classification of insulations

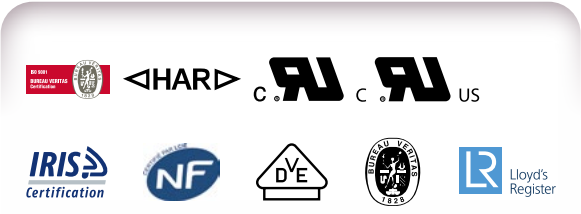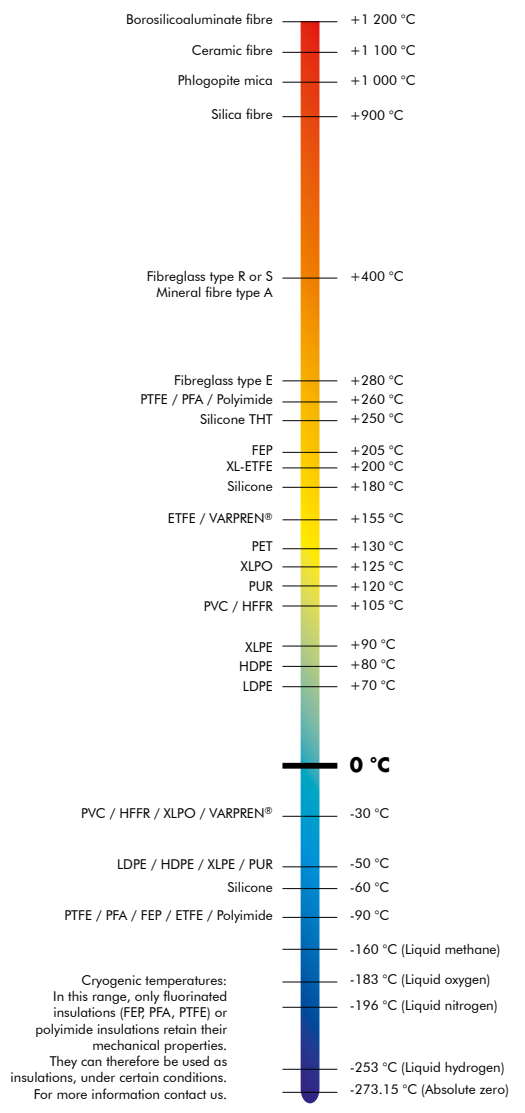



Contents

**THERMOCOUPLES, EXTENSION
AND COMPENSATION CABLES**

FT 8101 to 8108

Pages 7 to 15

**PLATINUM RESISTANCE TEMPERATURE
SENSORS CONNECTION CABLES**

FT 8201 to 8204

Pages 18 to 21

Product list

THERMOCOUPLES, EXTENSION AND COMPENSATION CABLES

FTNo.	PRODUCT REFERENCE	PAGE
8101	COUPLIX® - Thermocouple cables, general	7
8102	COUPLIX® - Extension and compensation cables, general	8
8103	COUPLIX® - Summary tables and standardised colour codes.....	9
8104	COUPLIX® - User guide and selection guide for pyrometry cables.....	10
8105	COUPLIX® - Thermocouple cables, construction and identification	12
8106	COUPLIX® - Thermocouple cables, main products	13
8107	COUPLIX® - Extension and compensation cables, construction and identification.....	14
8108	COUPLIX® - Extension and compensation cables, main products.....	15

PLATINUM RESISTANCE TEMPERATURE SENSORS CONNECTION CABLES

FTNo.	PRODUCT REFERENCE	PAGE
8201	SONDIX® - General	18
8202	SONDIX® - Main products	19
8203	SONDIX® - with fluorinated insulation and silicone sheath.....	20
8204	SONDIX® MC-ECS - with silicone insulation and sheath	21

**THERMOCOUPLES, EXTENSION
AND COMPENSATION CABLES**

FT No.	PRODUCT REFERENCE	PAGE
8101	COUPLIX® – Thermocouple cables, general	7
8102	COUPLIX® – Extension and compensation cables, general	8
8103	COUPLIX® – Summary tables and standardised colour codes	9
8104	COUPLIX® – User guide and selection guide for pyrometry cables	10
8105	COUPLIX® – Thermocouple cables, construction and identification	12
8106	COUPLIX® – Thermocouple cables, main products	13
8107	COUPLIX® – Extension and compensation cables, construction and identification	14
8108	COUPLIX® – Extension and compensation cables, main products	15



COUPLIX®

Thermocouple cables, general information

General - definitions

- Thermocouple: a thermocouple features a pair of conductors of different metals connected to their ends (measurement junction and reference junction) to measure a temperature by thermoelectric effect.
 - Thermoelectric effect (Seebeck): the thermoelectric effect is an electromotive force (FEM) produced by the temperature difference between the two junctions of the metal conductors on the thermocouple.
 - 1- Measurement junction (T1): thermocouple junction placed and subjected to the temperature to measure.
 - 2- Reference junction (T2): thermocouple junction of which the temperature is known (reference temperature).


Thermocouple tolerances

According to standard EN 60584-1, the tolerance is the maximum admissible initial difference in relation to the specified electromotive force. Except for types C and A, it is expressed in the form of a difference in degrees Celsius (°C) or as a function of the temperature t . The highest value is applied.

Principle of operation of a thermocouple

In the circuit formed by the two thermocouple conductors, where the junctions are raised to different temperatures $T1$ and $T2$, a current I is created and generates a measurable electromotive force (FEM) (figure 1) by thermoelectric effect, which itself depends on the temperature difference between $T1$ and $T2$ ($T1$: measurement junction, $T2$: reference junction) and the thermocouple used.

Also, if the metals are identical, the wires can cross zones of different temperatures without disrupting the temperature measurement between the two ends ($T3$ and $T4$ have no influence on the measurement), figure 2. The measurement instruments are designed to accommodate the thermocouple directly on their terminals that represent the reference junction.

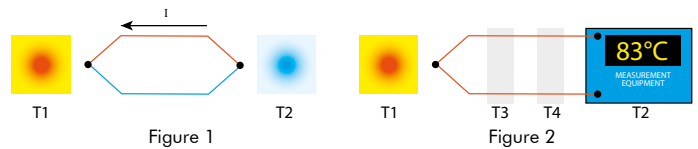

The relationship between the electromotive force and ($T1-T2$) is not exactly linear. The relationship between the electromotive force and the temperature in degrees is therefore expressed by polynomials $FEM=f(t^{\circ}C)$, where the reference junctions of the thermocouples are set to $0^{\circ}C$.

These polynomials are defined in standard EN 60584-1 for each of the standardised thermocouples.

Each type of thermocouple is used on a limited temperature range, fixed by the standard according to its nature and the environmental constraints.

TYPE OF THERMOCOUPLE

Nature of metals ⁽¹⁾

TOLERANCE VALUES

(TEMPERATURE VALIDITY LIMITS)

Symbol	Nature of metals ⁽¹⁾		TOLERANCE VALUES (TEMPERATURE VALIDITY LIMITS)		
	Positive conductor	Negative conductor	Class 1	Class 2	Class 3 ⁽²⁾
J	Iron	Cupronickel J	$\pm 1.5^{\circ}C$ or $\pm 0.004.t$ (-40 at +750 °C)	$\pm 2.5^{\circ}C$ or $\pm 0.0075.t$ (-40 to +750 °C)	-
K	Nickel-chromium	Nickel alloy	$\pm 1.5^{\circ}C$ or $\pm 0.004.t$ (-40 at +1000 °C)	$\pm 2.5^{\circ}C$ or $\pm 0.0075.t$ (-40 to +1200 °C)	$\pm 2.5^{\circ}C$ or $\pm 0.015.t$ (-200 to +40 °C)
T	Copper	Cupronickel T	$\pm 0.5^{\circ}C$ or $\pm 0.004.t$ (-40 at +350 °C)	$\pm 1.0^{\circ}C$ or $\pm 0.0075.t$ (-40 to +350 °C)	$\pm 1.0^{\circ}C$ or $\pm 0.015.t$ (-200 to +40 °C)
E	Nickel-chromium	Cupronickel E	$\pm 1.5^{\circ}C$ or $\pm 0.004.t$ (-40 at +800 °C)	$\pm 2.5^{\circ}C$ or $\pm 0.0075.t$ (-40 to +900 °C)	$\pm 2.5^{\circ}C$ or $\pm 0.015.t$ (-200 to +40 °C)
N	Nickel-chromium Silicium	Nickel-silicium	$\pm 1.5^{\circ}C$ or $\pm 0.004.t$ (-40 at +1000 °C)	$\pm 2.5^{\circ}C$ or $\pm 0.0075.t$ (-40 to +1200 °C)	$\pm 2.5^{\circ}C$ or $\pm 0.015.t$ (-200 to +40 °C)
R	Platinum 13% Rhodium	Platinum	$\pm 1.0^{\circ}C$ (0 to +1100 °C) AND $\pm [1 + 0.003 \times (t-1100)]^{\circ}C$ (+1100 to +1600 °C)	$\pm 1.5^{\circ}C$ or $\pm 0.0025.t$ (+600 to +1700 °C)	-
S	Platinum 10% Rhodium	Platinum	$\pm 1.0^{\circ}C$ (0 to +1100 °C) AND $\pm [1 + 0.003 \times (t-1100)]^{\circ}C$ (+1100 to +1600 °C)	$\pm 1.5^{\circ}C$ or $\pm 0.0025.t$ (+600 to +1700 °C)	-
B	Platinum 30% Rhodium	Platinum 6% Rhodium	-	$\pm 1.5^{\circ}C$ or $\pm 0.0025.t$ (+600 to +1700 °C)	$\pm 4.0^{\circ}C$ or $\pm 0.0025.t$ (+600 to +1700 °C)
C	Tungsten 5% Rhenium	Tungsten 26% Rhenium	-	$\pm 0.01.t$ (+426 to +2315 °C)	-
A	Tungsten 20% Rhenium	Tungsten 20% Rhenium	-	$\pm 0.01.t$ (+1000 to +2500 °C)	-

(1) No standard composition has been established for thermocouple alloys of ordinary metals, except for type N.

Nonetheless the composition itself is less critical than the selection of positive and negative conductors. The positive conductor and negative conductor must be paired.

In particular, the negative conductors on thermocouples J, E and T are not generally interchangeable.

(2) The materials used on type T, E, K and N thermocouples are normally supplied in respect of the tolerance values specified for temperatures above -40 °C. The materials used are permitted to not satisfy the tolerance values for temperatures below -40 °C indicated in class 3.

If thermocouples must satisfy the limits of class 3 along with those of classes 1 or 2, the buyer must specify this, as it will normally be necessary to select specific materials.

www.omerin.com

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force. For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

© Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.

For this product, please contact:

OMERIN division principale

Zone Industrielle - F 63600 Ambert

Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10

omerin@omerin.com

omerin
LES CABLES DE L'EXTREME

COUPLIX®**Extension and compensation cables,
general information****General - definitions**

Extension cables and compensation cables serve to connect the open ends of the two wires of a thermocouple at the reference junction in equipment where the thermocouple is not directly connected to the reference junction.

Extension cables

Extension cables are manufactured with wires of the same nominal metallurgic composition as the corresponding thermocouples. They are identified by the letter "X" placed after the thermocouple code, e.g. "JX".

The tolerance class is defined by the figures 1 or 2 placed after the extension cable symbol, e.g. "KX1".

Compensation cables

Compensation cables are manufactured with wires of a different nominal metallurgic composition as the corresponding thermocouples.

They are identified by the letter "C" placed after the thermocouple code, e.g. "KC". In certain cases, different tolerances apply to different temperature ranges for the same thermocouple.

They are distinguished by additional letters, e.g. KCA, KCB.

Tolerance values

The tolerance of an extension cable or compensation cable is the maximum additional difference expressed in microvolts, due to the presence of an extension cable or compensation cable in the temperature measurement circuit.

Principle of use

In most cases, thermocouples are located at quite a long distance from the measurement equipment, control equipment or recording equipment.

Therefore extension cables or compensation cables are used to connect the thermocouple to the equipment. These cables serve to transport the data originating from the thermocouple (figures 3 and 4).

The properties of these cables are similar to those of the corresponding thermocouples, but within a smaller temperature range and with different tolerances (see table).

The precision of the measurement is less when an extension cable or compensation cable is used.



Figure 3
(direct assembly)




Figure 4
(assembly with extension cable
or compensation cable)

**Identification and tolerance values for extension cables
and compensation cables**

Tolerance values are expressed in microvolts. The table also indicates, between brackets, the equivalent close tolerance in degrees Celsius. As the FEM-temperature relationship is not linear, the tolerance value in degrees Celsius depends on the temperature of the measurement junction on the thermocouple. The table data correspond to the "Temperature of the measurement junction" in the last column.

In most cases, the error expressed in degrees Celsius will be larger at lower measurement junction temperatures.

The junction between the thermocouple and the extension cable or compensation cable must be made in a zone compatible with the cable's temperature range.

Type of cable	Nature of conductor metals	Class 1		Class 2		Cable temperature range (1)	Measurement junction temperature
		Identification	Tolerance	Identification	Tolerance		
EXTENSION CABLES							
JX	Iron / Cupro-Nickel JX	JX1	± 85 μV (± 1.5 °C)	JX2	± 140 μV (± 2.5 °C)	-25 to +200 °C	500 °C
TX	Copper / Cupro-Nickel TX	TX1	± 30 μV (± 0.5 °C)	TX2	± 60 μV (± 1.0 °C)	-25 to +100 °C	300 °C
EX	Nickel-chromium / Cupro-Nickel EX	EX1	± 120 μV (± 1.5 °C)	EX2	± 200 μV (± 2.5 °C)	-25 to +200 °C	500 °C
KX	Nickel-chromium / Nickel alloy	KX1	± 60 μV (± 1.5 °C)	KX2	± 100 μV (± 2.5 °C)	-25 to +200 °C	900 °C
NX	Nickel-chromium-Silicium / Nickel-Silicium	NX1	± 60 μV (± 1.5 °C)	NX2	± 100 μV (± 2.5 °C)	-25 to +200 °C	900 °C
COMPENSATION CABLES							
KCA	Iron / Cupro-Nickel KCA	-	-	-	± 100 μV (± 2.5 °C)	0 to +150 °C	900 °C
KCB	Copper / Cupro-Nickel KCB	-	-	-	± 100 μV (± 2.5 °C)	0 to +100 °C	900 °C
NC	Nickel-chromium-Silicium / Nickel-Silicium	-	-	-	± 100 μV (± 2.5 °C)	0 to +150 °C	900 °C
RCA	Copper / Cupro-Nickel RCA	-	-	-	± 30 μV (± 2.5 °C)	0 to +100 °C	1000 °C
RCB	Copper / Cupro-Nickel RCB	-	-	-	± 60 μV (± 5.0 °C)	0 to +200 °C	1000 °C
SCA	Copper / Cupro-Nickel SCA	-	-	-	± 30 μV (± 2.5 °C)	0 to +100 °C	1000 °C
SCB	Copper / Cupro-Nickel SCB	-	-	-	± 60 μV (± 5.0 °C)	0 to +200 °C	1000 °C
BC	Copper / Copper alloy (2)	-	-	-	± 40 μV (± 3.5 °C)	0 to +150 °C	1400 °C

For this product, please contact:

OMERIN division principale
Zone Industrielle - F 63600 Ambert
Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10
omerin@omerin.com

(1) The temperature range of cables may be reduced to values below those indicated in the table due to the limit temperature of the insulation.

(2) A cable comprising two copper conductors may also be used with type B thermocouples; in this case the temperature range is reduced to: 0 °C to +100 °C.

www.omerin.com

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.
For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

© Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.

PYROMETRY CABLES

THERMOCOUPLES, EXTENSION AND COMPENSATION CABLES

COUPLIX®
Recap table and standardised colour codes

THERMOCOUPLES					
Symbols	Nature of metals		Temperature range (°C)	FEM at 0 °C (µV)	Seebeck coefficient at 0 °C (µV/°C)
	+	-			
T	Copper	Cupro-nickel T	-40 °C to +350 °C	0.4	38.7
J	Iron	Cupro-nickel J	-40 °C to +750 °C	0.5	50.4
E	Nickel-chromium	Cupro-nickel E	-40°C to +900 °C	0.6	58.7
K	Nickel-chromium	Nickel alloy	-40°C to +1200 °C	0.4	39.5
N	Nickel-chromium Silicium	Nickel Silicium	-40°C to +1200 °C	0.3	25.9
R	Platinum 13% Rhodium	Platinum	0°C to +1600 °C	0	5.3
S	Platinum 10% Rhodium	Platinum	0°C to +1600 °C	0	5.4
B	Platinum 30% Rhodium	Platinum 6% Rhodium	+600 °C to +1700 °C	0	-0.2
C	Tungsten 5% Rhenium	Tungsten 26% Rhenium	+426 °C to +2315 °C	0.1	13.4
A	Tungsten 5% Rhenium	Tungsten 20% Rhenium	1,000 °C to +2500 °C	0.8	12.0

EXTENSION - COMPENSATION						
Symbols		Nature of metals		Colour code (1) (2)		
Extension Class 1	Extension class 2 or compensation	+	-	EN 60584-3 - IEC 60584-3		ANSI-MC96.1 (1982)
				ANSI-MC96.1 (1982)		JIS C 1610 (1995)
TX1	TX2	Copper	Cupro-nickel TX			
JX1	JX2	Iron	Cupro-nickel JX			
EX1	EX2	Nickel-chromium	Cupro-nickel EX			
KX1	KX2	Nickel-chromium	Nickel alloy			
KCA	Iron	Cupro-nickel KCA				WX
KCB	Copper	Cupro-nickel KCB				VX
NX1	NX2	Nickel-chromium Silicium	Nickel Silicium			
RCA (3) OR RCB	Copper	Cupro-nickel RCA or RCB				RX
SCA (3) OR SCB	Copper	Cupro-nickel SCA or SCB				SX
BC	Copper	Copper alloy (4)				BX
CC	Cupro-Nickel Iron CC	Cupro-nickel CC				
AC						

(1) The colour codes represented are those for extension cables and compensation cables. Concerning thermocouple cables:
 - According to IEC / EN 60584-3 and JIS C 1610, the colour code supplied by OMERIN is the same as these standards do not define a colour code for thermocouples.
 - According to ANSHMC96.1, the colour of conductors is the same but the external colour is brown.
 (2) The colour codes of former standards NF C 42-323 and 42-324 (1985), BS 1843 (1952) and DIN 43714 (1979) are still used on rare occasions (contact us).
 (3) The materials used to manufacture SCA compensation cables are compatible with the temperature ranges and tolerance values of SCB, RCA and RCB. The standard manufactured by OMERIN is therefore SCA type, which can be used for the four applications.
 (4) When the thermocouple junction B / compensation cable BC remains at a temperature below 100 °C, the core of the two compensation cable conductors may be made of copper.
 (5) Although not described in the standards cited above, these colour codes are commonly used by the profession and therefore constitute our production standard.

www.omerin.com

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.
 For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.
 © Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.

For this product, please contact:

OMERIN division principale
 Zone Industrielle - F 63600 Ambert
 Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10
omerin@omerin.com



COUPLIX®**User guide and selection
guide for pyrometry cables****Thermocouples**

The choice of a thermocouple may be enforced, beyond the stipulations of IEC / EN 60584-1, by such aspects as the environment, the application, the temperature range required, the construction of the thermocouple, etc.

The tables below provide guidelines for use taken from the main thermocouple standards, limited to the products that we manufacture:

Table 1 (see next page) = Maximum recommended temperatures according to strand diameter.

Table 2 (see next page) = Environmental limits and recommendations.

The line resistance of the thermocouple has little effect on the precision of the measurement. Nonetheless it is important that the loop resistance of the cable (sum of the linear resistance of the two conductors multiplied by the length of the thermocouple cable) is below 100 ohms.

A greater cable cross-section is therefore needed if the cable is longer (see table 3 on next page).

**Extension and compensation**

When the thermocouples are located at a long distance from the measurement equipment, control equipment or recording equipment, it is possible to use extension cables or compensation cables to connect the thermocouple to the equipment.

In general these cables are more economical but they introduce additional imprecision in the measurement made.

Temperature limits

Furthermore, they have a more limited temperature range. It is therefore essential that the junction between the thermocouple and the extension cable or compensation cable lies within the temperature range of the cable. Similarly, in no case should the cable pass through a zone where the temperature exceeds the cable's temperature range.

Environmental limits

The cable environment must be taken into consideration. The cable must be protected against impacts, vibrations, mechanical stresses, etc.

Electromagnetic disturbances

The signals transmitted by these cables are very low voltages and are therefore sensitive to electromagnetic disturbance. They should not therefore be installed near to sources of disturbance (power cables, motors, etc.). It is recommended to use cables with an electrical screen (copper braid or aluminium tape).

Lengths

As indicated for thermocouples, the line resistance has little effect on the precision of the measurement, as the currents and voltages involved are very low. Nonetheless, imprecisions may be introduced into the signal if the run is too long or if the cross-sections used are too small, in particular due to external electromagnetic disturbance and the inevitable imperfection of the insulation used.

It is therefore important to adapt the cable cross-section to the length of the run, so to avoid introducing excessive loop resistance into the circuit in addition to that of the thermocouple.

A rule of thumb is that the loop resistance of the full circuit (sum of resistance to ohms of each conductor multiplied by the total length of the run) is less than 100 ohms, and in all cases at least a factor of 1000 less than the input resistance of the measurement equipment. Table 3 (see next page) indicates the main loop resistances of thermocouples, extension cables and compensation cables, to guide the user in their product selection.

In all cases

The limit temperatures and temperature ranges indicated in the tables are those specified by the applicable standards and supported by the constituent metals of the cable conductors.

The temperature range of cables therefore may be reduced to lower values due to the limit temperature of the insulation used.

It is therefore important to adapt the choice of insulation to ensure it is compatible with the cable temperature ranges, or to restrict the use of a pyrometry cable to temperatures that are compatible with both the authorised temperature range and the limits of its insulation.

For this product, please contact:

OMERIN division principale

Zone Industrielle - F 63600 Ambert

Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10

omerin@omerin.com

www.omerin.com

omerin
LES CABLES DE L'EXTREME

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.

For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

© Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.

TABLE 1

Maximum recommended temperatures (T_{max}) in °C according to the strand diameter (1)

Strand diameter (mm)	J	K	T	N	E
0.2	-	-	-	-	-
0.3	-	-	200	-	-
0.5	-	-	200	-	-
0.65	400	750	215	850	440
0.8	425	800	225	900	470
1.6	500	950	300	1050	570

(1) T_{max} = temperature specified so that under normal use, the expected deviation is 0.75% of T_{max} after 10,000 hours of continuous exposure in clean air.

The standard does not define any limits for small-diameter thermocouples, but whatever the situation this is less than that for thicker strands.

TABLE 2

Environmental restrictions to consider in the selection of thermocouples

Type of thermocouple	Limits and recommendations
T	Can be used in oxidizing, reducing or inert atmospheres and in a vacuum. Rapid oxidisation above 370 °C. Used preferentially on couple J under negative temperatures due to better resistance to corrosion in a humid environment.
J	Can be used in oxidizing, reducing or inert atmospheres and in a vacuum. Not recommended below 0 °C (risk of increased fragility). Rapid oxidization above 540 °C and in humid environment.
E	Can be used in oxidizing or inert environment. Rapid oxidization above 540 °C and in sulphur-rich environment. Operation in vacuum not recommended.
K	Can be used in oxidizing or inert environment. Unsuitable for use in sulphur-rich environment and unstable at high temperatures. Operation in vacuum not recommended.
N	Can be used in oxidizing or inert environment. Same use as for thermocouple K, but less sensitive to sulphur-rich or oxidising environments and more stable at high temperatures.

Also note that the metals used present varying stability to transmutation caused by neutron radiation.

The least stable is thermocouple T, then E, J, K and N is the most stable.

TABLE 3

Loop resistance of main thermocouples, extension cables and compensation cables produced by OMERIN

CS (mm ²)	Stranding (mm)	K	KX	KCA	KCB	J	JX	T	TX	E	EX	N	NX	SCA	BC	CC
0.03	1 x 0.2	31.25				18.37		15.61	15.61	37.1		41.37				
0.05	1 x 0.25	20.1				11.75										
0.07	1 x 0.3	13.89	13.89			8.16	8.16	6.94	6.94	16.49	16.49	18.39	18.39			8.66
0.2	1 x 0.5	4.89		2.61		2.88	2.88	2.47		5.84		6.47	6.47			
0.22	3 x 0.3	4.63	4.63	2.5	2.4	2.72	2.72	2.31	2.31	5.5	5.5		6.13	0.55	0.159	2.89
0.22	7 x 0.2	4.46	4.46	2.39		2.62	2.62	2.23	2.23	5.3						
0.32	1 x 0.65	3.01	3.01			1.77										
0.35	5 x 0.3		2.78	1.49	1.44	1.63	1.63	1.39	1.39		3.3		3.68			
0.5	1 x 0.8	1.92	1.92			1.17	1.17	0.98		2.32		2.54		0.23		
0.5	7 x 0.3	1.98	1.98	1.07	1.03	1.16	1.16	0.99	0.99		2.35		2.62	0.24	0.07	1.23
0.5	16 x 0.2	1.95	1.95			1.15	1.15						2.58			
0.75	11 x 0.3	1.27	1.27	0.68	0.65	0.74	0.74		0.63				1.67	0.15		
1	14 x 0.3		0.99	0.54	0.52		0.58		0.49		1.18		1.31	0.12	0.035	
1.34	19 x 0.3	0.73	0.73	0.39	0.38		0.43		0.36		0.87			0.087	0.025	
1.5	21 x 0.3		0.66	0.36		0.39	0.39		0.32		0.79		0.88	0.078	0.022	
2	1 x 1.6	0.48														

For this product, please contact:

OMERIN division principale

Zone Industrielle - F 63600 Ambert

Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10

omerin@omerin.com

www.omerin.com

omerin
LES CABLES DE L'EXTREME

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.

For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

© Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.

PYROMETRY CABLES


THERMOCOUPLES, EXTENSION AND COMPENSATION CABLES

COUPLIX®

Thermocouple cables, construction and identification

Conductive cores, stranding

Cross-section (mm ²)	Cross-section AWG	Stranding
0.03	32	1 x 0.20
0.05	30	1 x 0.25
0.07	28	1 x 0.30
0.2	24	1 x 0.50
0.22	24	7 x 0.20
0.22	24	3 x 0.30
0.34	22	1 x 0.65
0.34	22	5 x 0.30
0.5	20	1 x 0.80
0.5	20	7 x 0.30
0.5	20	16 x 0.20
0.75	-	11 x 0.30
1	18	14 x 0.30
1.34	16	19 x 0.30
1.5	-	21 x 0.30
2	14	1 x 1.60

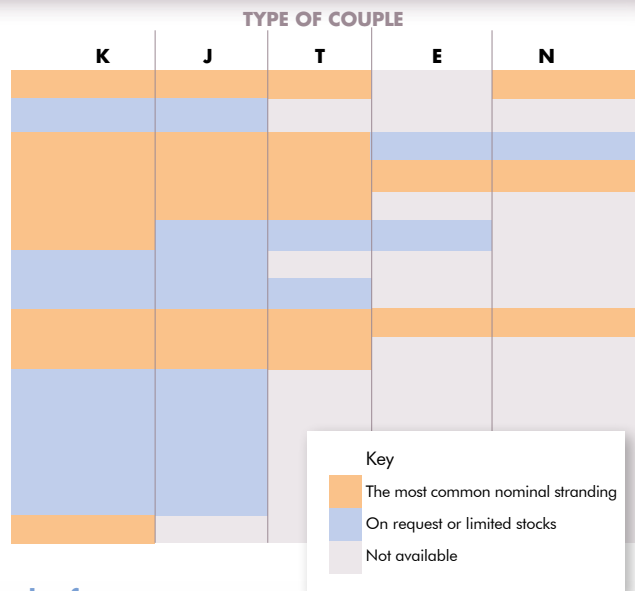


Approximate external dimensions of main cross-sections and references

Insulation reference (1)	Cable shape (2)	Cross-sections (stranding)					
		2 x 0.03 mm ² (1/0.20 mm)	2 x 0.07 mm ² (1/0.30 mm)	2 x 0.2 mm ² (1/0.50 mm)	2 x 0.22 mm ² (7/0.20 mm)	2 x 0.5 mm ² (1/0.80 mm)	2 x 0.5 mm ² (7/0.30 mm)
MY2-Y2	Round	3.0	3.2	3.6	3.8	4.6	4.8
M6-6	Flat	1.1 x 1.7	1.1 x 1.8	1.3 x 2.2	1.4 x 2.4	1.8 x 3.1	2.0 x 3.4
M5-5	Flat	1.1 x 1.7	1.1 x 1.8	1.3 x 2.2	1.4 x 2.4	1.8 x 3.1	2.0 x 3.4
MV-VS	Flat	1.2 x 1.8	1.3 x 2.0	1.5 x 2.4	1.6 x 2.6	1.8 x 3.2	2.0 x 3.6
MV-VS-R	Flat	1.2 x 1.8	1.3 x 2.0	1.5 x 2.4	1.6 x 2.6	1.8 x 3.2	2.0 x 3.6
MS-SI	flat	1.4 x 1.8	1.6 x 2.2	1.9 x 2.8	2.0 x 2.9	2.2 x 3.3	2.4 x 3.6
MNX-NX	flat	1.8 x 2.4	1.9 x 2.6	2.1 x 3.0	2.2 x 3.3	2.4 x 3.6	2.6 x 3.9
MK-K	flat	0.7 x 1.0	0.8 x 1.2	1.1 x 1.6	1.2 x 2.0	1.5 x 2.4	1.6 x 2.6

Options

- Other cross-sections and stranding: contact us.
 - Other types of insulation: contact us.
- Other thermoelectric couples (R, S, B, C, A): contact us.
 - Special pyrometric calibration tolerances: contact us.

Identification

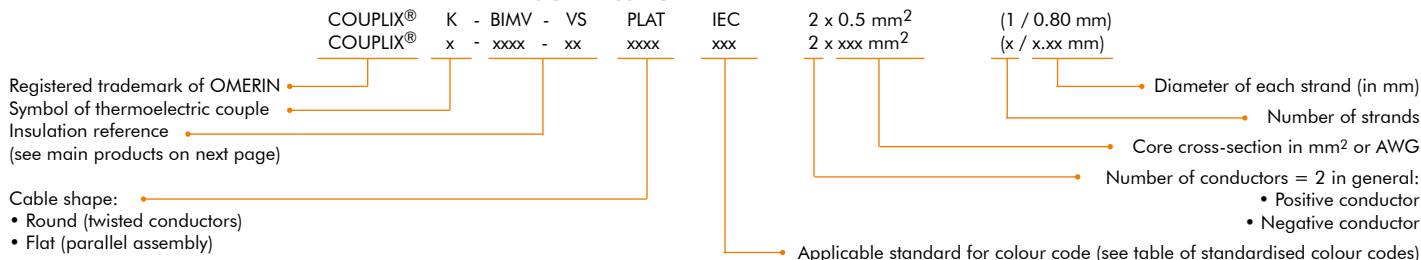

For this product, please contact:

OMERIN division principale
 Zone Industrielle - F 63600 Ambert
 Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10
 omerin@omerin.com



(1) By request, all these products can be equipped with an electrical screen or flexible armour over the sheath.
 • tin-plated copper electrical screen (BE symbol in front of reference): external dimensions increased by approx. 0.5 mm.
 • AISI 304 stainless steel flexible armour (BI symbol in front of reference): external dimensions increased by approx. 0.6 mm.
 • galvanised steel flexible armour (BG symbol in front of reference): external dimensions increased by approx. 0.8 mm.

An electrical screen (BE) may also be placed between the conductors and the outer sheath.

(2) Flat cables (parallel conductors) may also be produced in round shape. The conductors are twisted around each other with fillers if necessary. In this case, the outer diameter is equal to the largest dimension of the flat cable. Round cables may not be produced as flat cables.

www.omerin.com








The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.
 For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.
 © Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.

PYROMETRY CABLES

THERMOCOUPLES, EXTENSION
AND COMPENSATION CABLES

COUPLIX®

Thermocouple cables,
main products

Diagram	Extension or compensation symbol	COUPLIX® reference	Conductor insulation	Sheathing material	Temperature of insulation at continuous operating temperature (1)
<p>Colour represented = IEC, K couple</p> 	T, J, E, K, N	- MY2-Y2 - M6-6 - M5-5	PVC 105 °C FEP PFA	PVC 105 °C FEP PFA	-30 to +105 °C -190 to +205 °C -190 to +260 °C
<p>Colour represented = IEC, J couple</p> 	T, J, E, K, N	- MVVS - MVVS-R	Fibreglass High temperature fibreglass	Fibreglass High temperature fibreglass	-60 to +300 °C -60 to +400 °C
<p>Colour represented = white (invariable)</p> 	E, K, N	- MSI-SI - MNX-NX	Silica fibre Borosilicoaluminat fibre	Silica fibre Borosilicoaluminat fibre	0 to +1000 °C 0 to +1200 °C
<p>Colour represented = amber (invariable)</p> 	T, J, E, K, N	- MKK	Polyimide	Polyimide	-190 to +350 °C
<p>Colour represented = IEC, N couple</p> 	T, J, E, K, N	- BIM-Y2 - BGM-Y2 - BEM-Y2 - BIM-FEP - BGM-FEP - BEM-FEP - BIM-PFA	PVC 105 °C PVC 105 °C PVC 105 °C FEP FEP FEP PFA	Stainless steel braid Galvanized steel braid Tin-plated copper braid Stainless steel braid Galvanized steel braid Tin-plated copper braid Stainless steel braid	-30 to +105 °C -190 to +205 °C -190 to +260 °C
<p>Colour represented = ANSI, K couple</p> 	T, J, E, K, N	- BIMY2-Y2 - BGMY2-Y2 - BEMY2-Y2 - BIM6-6 - BGM6-6 - BEM6-6 - BIM5-5	PVC 105 °C PVC 105 °C PVC 105 °C FEP FEP FEP PFA	PVC 105 °C / Stainless steel braid PVC 105 °C / Tin-plated copper braid PVC 105 °C / Stainless steel braid FEP / Stainless steel braid FEP / Galvanised steel braid FEP / Tin-plated copper braid PFA / Stainless steel braid	-30 to +105 °C -190 to +205 °C -190 to +260 °C
<p>Colour represented = IEC, E couple</p> 	T, J, E, K, N	- BIMVVS - BGMVVS - BEMVVS - BIMVVS-R	Fibreglass Fibreglass Fibreglass High temperature fibreglass	Fibreglass / Stainless steel braid Fibreglass / Galvanised steel braid Fibreglass / Tin-plated copper braid High temperature fibreglass High temperature fibreglass Stainless steel braid	-60 to +300 °C -60 to +250 °C -60 to +400 °C

For this product, please contact:

OMERIN division principale
Zone Industrielle - F 63600 Ambert
Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10
omerin@omerin.com

(1) Caution: the limit temperature of the insulation does not forcibly match the field of use of the thermocouple.

It may be higher or lower than required.

It is important to take into account the limits of use of the thermocouple in question and those of the insulation to calculate the possible range of use of one of our thermocouple cables.

www.omerin.com

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.

For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

® Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.

PYROMETRY CABLES

THERMOCOUPLES, EXTENSION
AND COMPENSATION CABLES**COUPLIX®****Extension and compensation cables,
main products**

Diagram	Extension or compensation symbols	COUPLIX® reference (1)	Cable shape (2)	Conductor insulation	Sheathing material	Temperature of insulation at continuous operating temperature (3)
	All types	- MY2-Y2	Round	PVC 105 °C	PVC 105 °C	-30 to +105 °C
Colour represented = IEC, KX1		- MC-CS	Round	Silicone	Silicone	-60 to +200 °C
	All types	- MY2BE-Y2	Round	PVC 105 °C	Screen (tin-plated copper braid) + PVC 105 °C	-30 to +105 °C
Colour represented = IEC, JX1		- MCBE-CS	Round	Silicone	Screen (tin-plated copper braid) + silicone	-60 to +200 °C
	All types	- MY2BAL-Y2	Round	PVC 105 °C	Screen (PET/aluminium tape) + PVC 105 °C	-30 to +105 °C
Colour represented = IEC, EX1		- MCBAL-CS	Round	Silicone	Screen (PET/aluminium tape) + silicone	-60 to +200 °C
	All types	- MC-FEP	Round	FEP	Silicone	-60 to +205 °C
Colour represented = IEC, TX1	All types	- MCBE-FEP	Round	FEP	Screen (tin-plated copper braid) + silicone	-60 to +205 °C
		Colour represented = IEC, NX1				
	All types	- M6-6	Round	FEP	PEP	-190 to +205 °C
Colour represented = IEC, JX1		- M5-5	Round	PFA	PFA	-190 to +260 °C
	All types	- M6BE-6	Round	FEP	Screen (tin-plated copper braid) / FEP	-190 to +205 °C
Colour represented = IEC, KX1		- M5BE-5	Round	PFA	Screen (tin-plated copper braid) / PFA	-190 to +260 °C
	All types	- MV-PFA	Flat	PFA	Fibreglass	-60 to +260 °C
Colour represented = IEC, EX1	All types	- BGMV-CS	Flat	Silicone	Fibreglass + Galvanised steel braid	-60 to +220 °C
		Colour represented = IEC, KX1				
	All types	- MV-VS	Flat	Fibreglass	Fibreglass	-60 to +300 °C
Colour represented = IEC, JX1		- MV-VS-R	Flat	High temperature fibreglass	High temperature fibreglass	-60 to +400 °C
	All types	- BGMV-VS	Round	Fibreglass	Fibreglass + Galvanised steel braid	-60 to +300 °C
Colour represented = IEC, SCA		- BIMV-VS	Round	Fibreglass	Fibreglass + Stainless steel braid	-60 to +300 °C
	All types	- BGMV-FEP	Round	FEP	Fibreglass + Galvanised steel braid	-60 to +205 °C
Colour represented = IEC, KX1		- BIMV-PFA	Round	PFA	Fibreglass + Stainless steel braid	-60 to +260 °C
	All types	- MVK-KVS	Round	Polyimide / Fibreglass	Polymide / Fibreglass	-60 to +350 °C
Colour represented = IEC, JX1						

For this product, please contact:

OMERIN division principale

Zone Industrielle - F 63600 Ambert

Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10

omerin@omerin.com

(1) We strongly recommend the use of extension cables or compensation cables with electrical screens as surrounding electromagnetic disturbances may be sources of imprecision in the signal carried.

(2) Flat cables (parallel conductors) may also be produced in round shape. The conductors are twisted around each other with filling as necessary. Round cables may not be produced as flat cables.


(3) Caution: the limit temperature of the insulation does not forcibly match the field of use of the extension cable or compensation cable. It may be higher or lower than required. It is important to take into account the limits of use of the extension or compensation metal components in question and those of the insulation to calculate the possible range of use of one of our extension cables or compensation cables.

www.omerin.com

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.

For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

® Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.



PLATINUM RESISTANCE TEMPERATURE SENSORS CONNECTION CABLES

FT No.	PRODUCT REFERENCE	PAGE
8201	SONDIX® - General	18
8202	SONDIX® - Main products	19
8203	SONDIX® - with fluorinated insulation and silicone sheath	20
8204	SONDIX® MC-ECS - with insulation and silicone sheath	21

SONDIX®

General information

Principle of operation

Sensor connection cables are used to link platinum resistance temperature sensors to measurement equipment.

OPERATION OF PLATINUM SENSORS

The electrical resistance of a metal conductor increases as the temperature rises. This change is reversible.

For sensors, the most commonly-used metal is platinum, which retains good linearity over a wide temperature range (from -200 °C to +850 °C). Its purity and chemical inertia ensure remarkable stability.

The relationship between the platinum resistance and the temperature is:

$$R_t = R_0 [1 + A.t + B.t^2 + C (t - 100).t^3]$$

- R_t = resistance at temperature t
- R_0 = resistance at 0 °C
- t = temperature in °C

For the quality of platinum generally used in industrial resistance thermometers, the values of the constants A, B and C are:

- $A = 3.9083 \times 10^{-3} \text{ } ^\circ\text{C}^{-1}$
- $B = -5.775 \times 10^{-7} \text{ } ^\circ\text{C}^{-2}$
- $C = -4.183 \times 10^{-12} \text{ } ^\circ\text{C}^{-3}$ for negative temperatures and $C = 0$ for positive temperatures.

The most frequently-used resistance sensor is $R_0 = 100$ ohms (at 0 °C) and $R_{100} = 138.5$ ohms (at 100 °C).

It is usually called a Pt 100 sensor.

Applicable tolerance values are defined in IEC 60751.

Tolerance class	Tolerance (°C)
A	$0.15 + 0.002 t $
B	$0.30 + 0.005 t $

Tolerance class A is not used for sensors operating at above 650 °C.

Approvals - standards

- Cables and identification as per IEC 60 751, NF C 43-330, DIN 43760 and BS 1904.

Standard products

- Cables with 2, 3 or 4 conductors, 6 or 8 more rarely.
- Standard identification: 2 conductors: red / white.
3 conductors: 2 red / 1 white.
4 conductors: 2 red / 2 white.
- Standard colours of silicone sheaths: grey or brick red.
- Standard colours of FEP or PFA sheaths: white.
- Standard colours of outer fibreglass sheaths: white.
- Other colours on request.
- Nature of conductive cores: bare copper, tin-plated, silver-plated or nickel-plated.
- Outer diameters: contact us.


Options

- Other numbers of conductors: contact us.
- Other cross-sections and conductor metals: contact us.
- Other insulation and sheathing materials: contact us.

Applications

- Wiring of platinum resistance temperature sensors.

Assemblies used

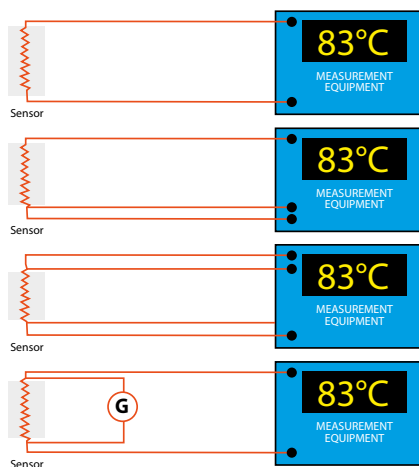

• 2-conductor cable

Most frequently used but least precise as it introduces line resistance in the measurement.

Must not be used for class A sensors.

• 3-conductor cable - Wheatstone bridge measurement

Line wire resistance has little effect. Only contact resistances introduce an error.

• 4-conductor cable - Wheatstone bridge measurement

Line resistance is eliminated. Only contact resistances introduce an error.

• 4-conductor cable - Kelvin measurement

A current is present in the sensor. The potential difference (d.d.p) is measured at its terminals, which depends on its resistance.

For this reason, only the sensor resistance has an effect on the measurement, which is more precise than previous ones.

For this product, please contact:

OMERIN division principale
Zone Industrielle - F 63600 Ambert
Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10
omerin@omerin.com

www.omerin.com








omerin
LES CABLES DE L'EXTREME

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.
For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.
© Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.

PYROMETRY CABLES

PLATINUM RESISTANCE TEMPERATURE SENSORS CONNECTION CABLES

SONDIX®
Main products

Diagram	SONDIX® reference	Conductor	Sheath	Operating temperature
	<ul style="list-style-type: none"> • MY2Y2 • MC-CS 	PVC 105 Silicone	PVC 105 Silicone	-30 to +105° C -60 to +200° C
	<ul style="list-style-type: none"> • M5-5 • M6-6 • M7-7 	PFA FEP ETFE	PFA FEP ETFE	-190 to +260 °C -190 to +205 °C -90 to +155 °C
	<ul style="list-style-type: none"> • MC-FEP 	FEP	Silicone	-60 to +200 °C
	<ul style="list-style-type: none"> • MV-PFA 	PFA	Fibreglass	-60 to +260 °C
	<ul style="list-style-type: none"> • MV-VS 	Fibreglass	Fibreglass	-60 to +300 °C
	<ul style="list-style-type: none"> • MV-VS-R 	High temperature fibreglass	High temperature fibreglass	-60 to +400 °C
	<ul style="list-style-type: none"> • MV-KVS 	Polymide + Fibreglass	Fibreglass	-60 to +350 °C

Conductors, cross-sections and core stranding

Number of conductors	Cross-section in mm ²	Equivalence AWG	Stranding number of strands x Ø (mm)
2, 3, 4, 6 or 8	0.14	26	7 X 0.16
2, 3, 4, 6 or 8	0.15	26	19 X 0.10
2, 3, 4, 6 or 8	0.22	24	7 X 0.20
2, 3, 4, 6 or 8	0.25	24	19 X 0.13
2, 3, or 4	0.34	22	7 X 0.25
2, 3, or 4	0.34	22	19 X 0.15
2, 3, or 4	0.50	20	7 X 0.30
2, 3, or 4	0.60	20	19 X 0.20


Nature of cores
(identification / symbol in our references)

- Bare copper (CuA1 / -)
- Tin-plated copper (CuSn / E)
- Silver-plated copper (CuAg / A)
- Nickel-plated copper (CuNi / CN)
- Pure silver (Ag / Ag)
- Pure nickel (Ni / N)

SONDIX® with electrical screen and/or flexible outer armour

- With tin-plated copper electrical screen: ref. xxxBE-xxx.
in nickel-plated copper: ref. xxxBCN-xxx.
in silver-plated copper: ref. xxxBA-xxx.
- With electrical screen of PET / aluminium tape + continuity wire: ref. xxxBAL-xxx.
- With stainless steel braid flexible outer armour: ref. Blxxx-xxx.
in galvanised steel: ref. BGxxx-xxx.
in tin-plated copper: ref. BExxx-xxx.


Identification

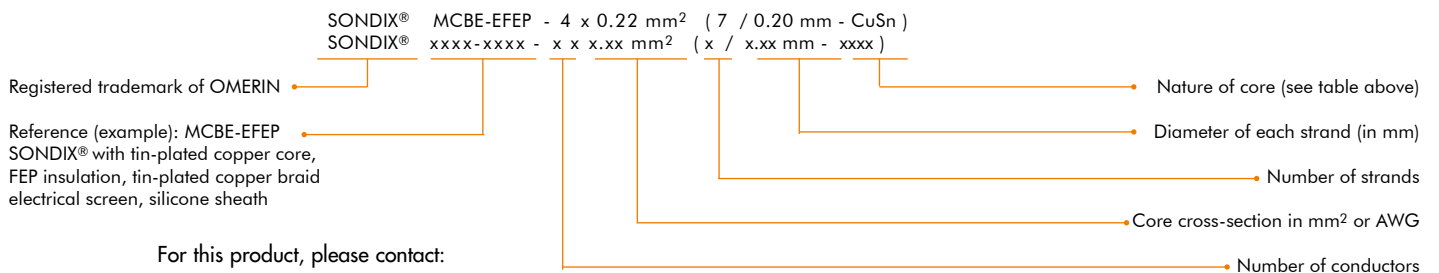

PYROMETRY CABLES

PLATINUM RESISTANCE TEMPERATURE SENSORS CONNECTION CABLES

SONDIX®
with fluorinated insulation
and silicone sheath
-60°C to +220°C

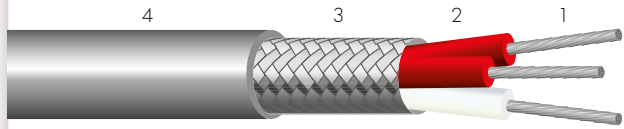

- 1 • Bare, tin-plated, nickel-plated or silver-plated copper core.
- 2 • Fluorinated polymer ETFE, FEP or PFA.
- 3 • Optional electrical screen, tin-plated, nickel-plated or silver-plated copper.
- 4 • Silicone rubber outer sheath.

Approvals - standards

- Cables and identification as per IEC 60 751, NF C 43-330, DIN 43760 and BS 1904.

Applications

- Wiring of platinum resistance temperature sensors.

Options

- Other core cross-sections or number of conductors: contact us.
- Solid or extra-flexible cores: contact us.

Characteristics General

- Maximum admissible temperature of cable according to insulation used:

	ETFE	FEP	PFA
Continuous operation -60 °C to:	+150	+200	+220°C
Short period -60 °C to:	+170	+220	+260°C

- Excellent resistance to humidity and UV.
- Excellent resistance to chemical influences.

Electrical

- Operating voltage: 300 V.

Standard products

- 2, 3, 4, 6 or 8 conductors.
- Identification: 2 conductors: 1 red / 1 white.
3 conductors: 2 red / 1 white.
4 conductors: 2 red / 2 white.
6 conductors: 4 red / 2 white.
8 conductors: 4 red / 4 white.
- Sheath colours: grey or brick red.

Product references

Core / screen	Unshielded cables			Shielded cables		
	Insulation			Insulation		
	ETFE	FEP	PFA	ETFE	FEP	PFA
• Bare copper (CuAl)	MCETFE	-	-	-	-	-
• Tin-plated copper (CuSn)	MC-EETFE	MCE-FEP	MCE-PFA	MCBE-EETFE	MCBE-EFEP	MCBE-EPFA
• Silver-plated copper (CuAg)	-	MC-AFEP	MC-APFA	-	MCBA-AFEP	MCBA-APFA
• Nickel-plated copper (CuNi)	-	-	MCCNPFA	-	-	MCCBCN-CNPFA

Nominal cross-section (mm ²)	Insulated conductors			Unshielded cables	Shielded cables	
	Nominal stranding	Outside diameter (mm)	Maximum linear resistance at 20°C (CuSn) (Ω/km)		Diameter of braid strands (mm)	Nominal outside diameter (mm)
2 x 0.14 (1)	7 x 0.16 (1)	0.8	166	2.8	0.10	3.8
3 x 0.14 (1)	7 x 0.16 (1)	0.8	166	3.2	0.10	4.0
4 x 0.14 (1)	7 x 0.16 (1)	0.8	166	3.6	0.10	4.2
6 x 0.14 (1)	7 x 0.16 (1)	0.8	166	4.2	0.10	4.8
2 x 0.22	7 x 0.20	1.0	92.5	3.2	0.10	3.8
3 x 0.22	7 x 0.20	1.0	92.5	3.8	0.10	4.2
4 x 0.22	7 x 0.20	1.0	92.5	3.8	0.10	4.4
6 x 0.22	7 x 0.20	1.0	92.5	4.5	0.10	5.0
8 x 0.22	7 x 0.20	1.0	92.5	5.2	0.10	5.6
2 x 0.34	7 x 0.25	1.15	59.2	3.5	0.10	4.2
3 x 0.34	7 x 0.25	1.15	59.2	3.8	0.10	4.4
4 x 0.34	7 x 0.25	1.15	59.2	4.0	0.10	4.6
6 x 0.34	7 x 0.25	1.15	59.2	4.8	0.10	5.2

For this product, please contact:

(1) In bare copper (CuAl) the nominal cross-section and nominal stranding are : 0,12 mm² (7 x 0,15).

OMERIN division principale
Zone Industrielle - F 63600 Ambert
Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10
omerin@omerin.com

www.omerin.com




The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.
For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.
© Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.

SONDIX® MC-ECS

with insulation
and silicone sheath

-60°C to +200°C

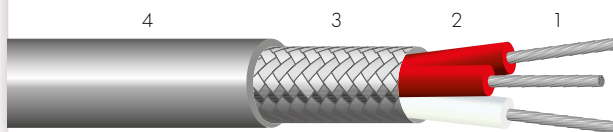

- 1 • Tin-plated copper core.
- 2 • Silicone rubber insulation.
- 3 • Optional electrical screen, tin-plated copper (ref. MCBE-ECS).
- 4 • Silicone rubber outer sheath.

Approvals - standards

- Cables and identification as per IEC 60 751, NF C 43-330, DIN 43760 and BS 1904.

Applications

- Wiring of platinum resistance temperature sensors.

Options

- Bare copper core, ref. MC-CS: contact us.
- Other core cross-sections or number of conductors: contact us.
- Solid or extra-flexible cores: contact us.
 - Cores and optional electrical screen, nickel-plated copper ref. MC-CNCS and MCBCN-CNCS: contact us.

Characteristics General

- Maximum admissible temperature under continuous operation: -60°C to +200°C.
- Excellent resistance to humidity and UV.

Electrical

- Operating voltage: 300 V.

Standard products

- 2, 3, 4, 6 or 8 conductors.
- Identification: 2 conductors: 1 red / 1 white.
3 conductors: 2 red / 1 white.
4 conductors: 2 red / 2 white.
6 conductors: 4 red / 2 white.
8 conductors: 4 red / 4 white.
- Sheath colours: grey or brick red.

MC-ECS

MCBE-ECS

Nominal cross-section (mm ²)	Insulated conductors			Unshielded cables	Shielded cables	
	Nominal stranding	Outside diameter (mm)	Maximum linear resistance at 20°C (Ω/km)	Nominal outside diameter (mm)	Diameter of braid strands (mm)	Nominal outside diameter (mm)
2 x 0.15	19 x 0.10	1.2	166	4.0	0.10	4.5
3 x 0.15	19 x 0.10	1.2	166	4.2	0.10	4.7
4 x 0.15	19 x 0.10	1.2	166	4.5	0.10	5.0
2 x 0.22	7 x 0.20	1.3	92.5	3.8	0.10	4.5
3 x 0.22	7 x 0.20	1.3	92.5	3.8	0.10	4.8
4 x 0.22	7 x 0.20	1.3	92.5	4.8	0.10	5.2
6 x 0.22	7 x 0.20	1.3	92.5	5.8	0.10	6.0
2 x 0.34	7 x 0.25	1.5	59.2	4.0	0.10	5.8
3 x 0.34	7 x 0.25	1.5	59.2	5.0	0.10	6.2
4 x 0.34	7 x 0.25	1.5	59.2	5.8	0.10	6.4
2 x 0.5	16 x 0.20	2.1	40.1	5.0	0.13	6.2
3 x 0.5	16 x 0.20	2.1	40.1	6.2	0.13	6.8
4 x 0.5	16 x 0.20	2.1	40.1	6.8	0.13	7.2

For this product, please contact:

OMERIN division principale

Zone Industrielle - F 63600 Ambert

Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10

omerin@omerin.com


www.omerin.com

omerin
LES CABLES DE L'EXTREME

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.

For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

© Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.





omerin
division principale

Headquarters and division principale
Zone industrielle - 63600 Ambert - France

TEL. +33 (0)4 73 82 50 00

Fax +33 (0)4 73 82 50 10

e-mail : omerin@omerin.com

omerin
division silisol

division silisol
B.P. 87 - 11, allée du Couchant Z.I. du Devey
42010 Saint-Etienne Cedex 2 - France

TEL. +33 (0)4 77 81 36 00

Fax +33 (0)4 77 81 37 00

e-mail : silisol@omerin.com

www.omerin.com